



Excess-Flow Valve

Self-acting, flow actuated shut-off valve

Excess Flow-valve DBV Series

Design:

- leak-tight shut-off
(manual reset required after actuation)
- limitation to minimal flow
(automatic reset after shut-off of downstream line)

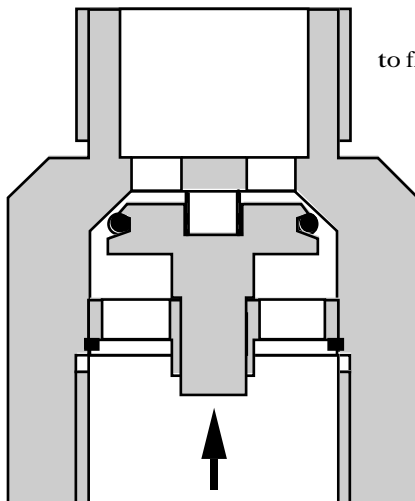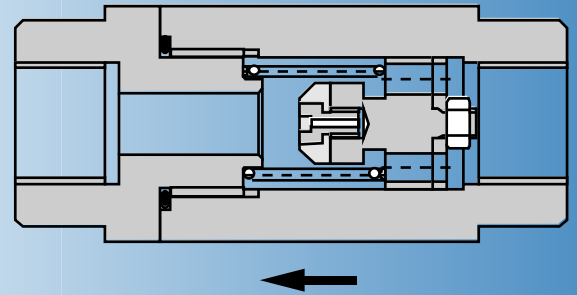

(Pre-) Setting:
to flow in low-pressure applications
to max. allowable differential
pressure in high-pressure
applications

- Spring loaded
- Materials:
Brass, st.st., POM and others upon request
- Seals:
Buna-N, EPDR, Viton, Chemraz
PTFE
- Operating pressures up to 350 bar
- Nominal diameter:
8 - 25mm
- Operating temperature: -20°C...+70°C
(others upon request)
- Fluids: Gases compatible with materials of construction

What we would like to know

Pressure source: _____

max. flow / ΔP : _____ Temperature: _____

Fluid : _____ System details: _____

Application: _____

DRUKON
Druck-Kontrolltechnik GmbH
Hauptstraße 29
02794 Spitzkunnersdorf

Tel. +49 35842/2 76 30
Fax +49 35842/2 76 31

e-mail: info@drukun.de
www.drukun.de