


Relief-valves

crack-pressures ≥ 35 mbar

U-Series

End connections: up to 1"
Set-pressures up to 83 bar

UA Series:	Operating pressure: 16bar 1/8", low cost
UB Series:	Operating pressure: 16bar 1/4", low cost
UC Series:	Operating pressure: 16bar 3/8", low cost
UD Series:	Operating pressure: 16bar 1/2", low cost
Options:	deflector cap manual override inline design inline design, balanced

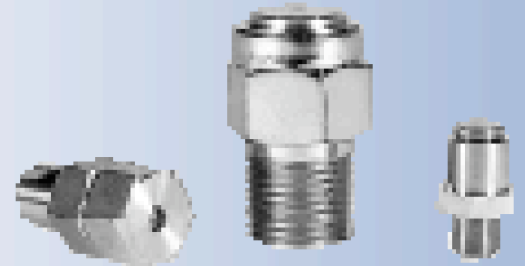

Documentation:
EN 10204-2.2 standard
3.1 B upon request

Large variety of specials and distribution products

- set-pressures up to 83 bar
- end connection up to 1"
- Cryogenic applications (-196°C)

- **Leak-tight** < 98% of crack pressure
- **Re-seal:**
 - > 80% of crack-pressure <70 mbar
 - > 92% of crack-pressure > 70 mbar
- **Materials:**
 - Brass
 - St.st.
 - Specials upon request
- **Elastomeres** Buna-N, Viton, EPDR, PTFE, Silicone
- **Threads:** BSPT, BSPP, NPT
- **Operating temperature:** -196°C...+150°C
- **Media:** Gases or liquids (compatible with materials of construction)

What we would like to know:

System pressure: _____

Set pressure: _____

Medium : _____

Flow: _____

Application: _____

DRUKON
Druck-Kontrolltechnik
GmbH
Hauptstraße 29
02794 Spitzkunnersdorf

Tel. 035842/2 76 30
Fax 035842/2 76 31

e-mail: info@drukón.de